

FILTERS, FILTER CLEANING & MORE

Provent Kit for Mitsubishi Triton ML MN & Challengers 2.5L DI-D 4D56 Common Rail

KIT No: OS-PROV-05-4x4



Fitting Instructions for Mann Provent 200 Catch Can Kit Prov-05-4x4

- STEP 1:** Switch off engine, remove the keys from the ignition and ensure the engine is cool enough to work in the engine bay.
- STEP 2:** Remove plastic engine cover (img.1).
- STEP 3:** Before attaching the Provent unit to the Stainless mounting bracket, turn the unit '2 Clicks' (60 degrees) clockwise (img.2).
- STEP 4:** Fit the clear drain hose to the bottom outlet of the Provent unit (img.3).
- STEP 5:** Identify bolt hole to attach the supplied Stainless Mounting bracket to (img.4).




Step 2 / Img 1:



Step 3 / Img 2:



Step 4 / Img 3:

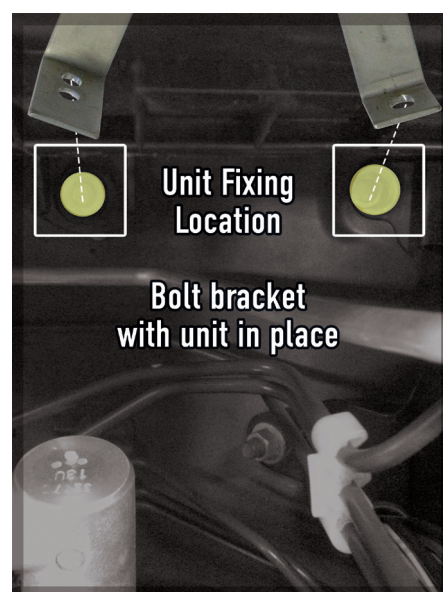

Step 5 / Img 4:

FILTERS, FILTER CLEANING & MORE

Provent Kit for Mitsubishi Triton ML MN & Challengers 2.5L DI-D 4D56 Common Rail

KIT No: OS-PROV-05-4x4


STEP 6: Mount the bracket to the vehicle, running the clear drain hose down between the inner guard and chassis rail, attach ball valve, secure with supplied clamp and ensure ball valve is in horizontal or closed position (img.5).

STEP 7: Remove Breather tube running from the top of the crank case to the Air Inlet (img6).


STEP 8: Attach the supplied bent hose to the lower outlet of the Provent unit & join to the Air Inlet, secure all hoses with supplied clamps (img7).

STEP 9: Attach the Longer supplied hose to the Top Inlet of the Provent Unit, then attach the 16mm end to the Outlet at the top of the crank case - secure with supplied clamps (img7).


STEP 10: Re-fit the Plastic Engine Cover (img8).

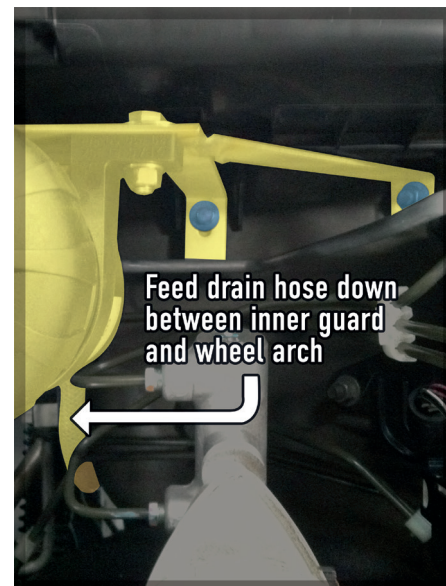


Step 6 / Img 5:

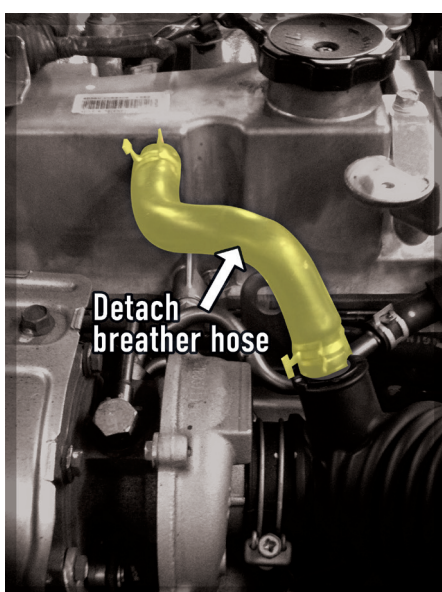

Step 7 / Img 6:

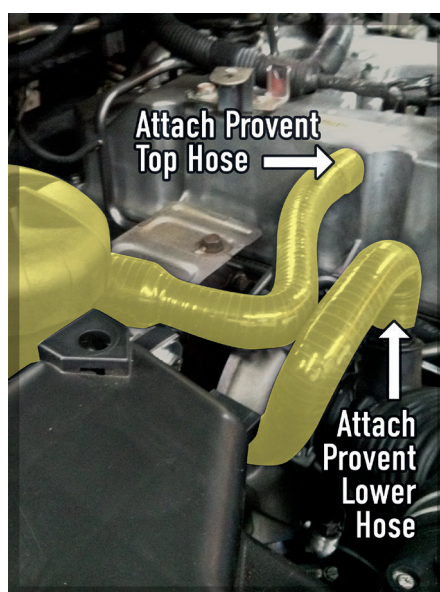

Step 8 / Img 7:

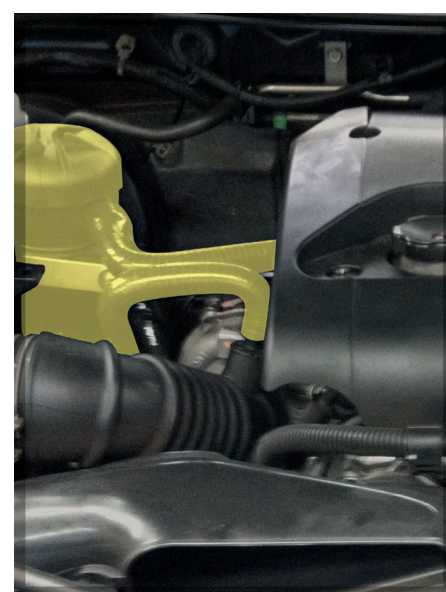

Step 9 / Img8: