

## FILTERS, FILTER CLEANING & MORE

Provent Kit for Nissan Navara 2.3L ST NP300 2015-on 4x4 D23 YD23 DOHC Di I6V

**KIT No: OS-PROV-I7**



### Fitting Instructions for Provent 200 Kit

**NOTE:** There is a Single Turbo version requiring a longer Top Hose (10cm). Please notify us if your vehicle has a Single Turbo version !

**STEP 1:** Ensure engine is off and cool. Remove plastic engine cover.

**STEP 2:** Remove OEM hose from the crank case outlet.  
(note: later connects to Provent's lower outlet's hose).


**STEP 3:** Attach Drain Hose to base of Provent base, secure with hose clamp, feed drain hose down through engine bay.

**STEP 4:** Fit Provent Bracket using OEM nuts.  
Remove OEM nuts, place bracket over bolts, return nuts.


**STEP 5:** Attach Provent to WF bracket using supplied fittings.




**Step2:**

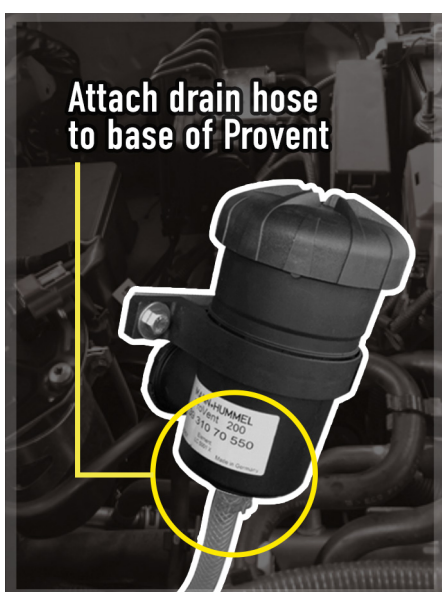

**Step3:**

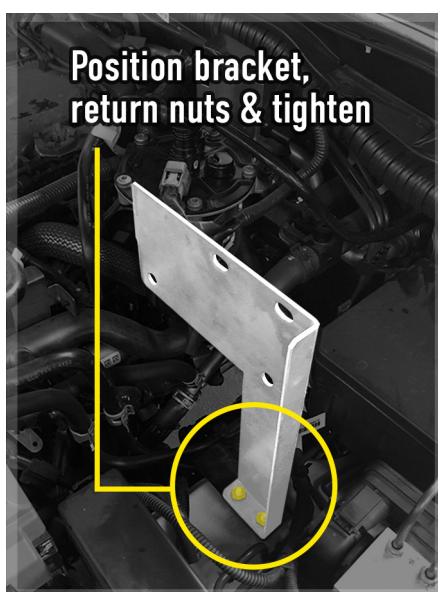

**Step4:**

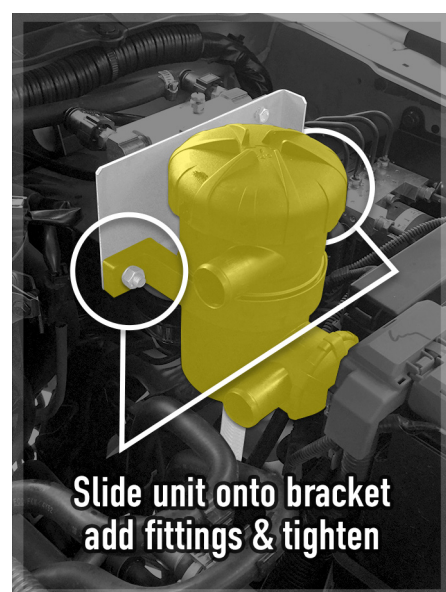

**Step5:**

## FILTERS, FILTER CLEANING & MORE

Provent Kit for Nissan Navara 2.3L ST NP300 2015-on 4x4 D23 YD23 DOHC Di I6V

### KIT No: OS-PROV-I7

#### STEP 6: Connect Provent Lower Hose:


- Attach shorter hose to the Lower Outlet on the Provent Unit.
- Loop the hose around the back of the engine
- Join to the OEM Hose (connected to the Air Intake (img.6 & 8)).

#### STEP 7: Connect Provent Top Hose:


- Attach molded, longer hose to the Top Inlet of the Provent Unit.
- Loop the hose around the back of the engine (as above).
- Attach the end with the 90° to the Crank Case Outlet (img.6 & 8).

#### STEP 8: Cable Ties as shown.


#### STEP 9: Return the Plastic Engine cover.

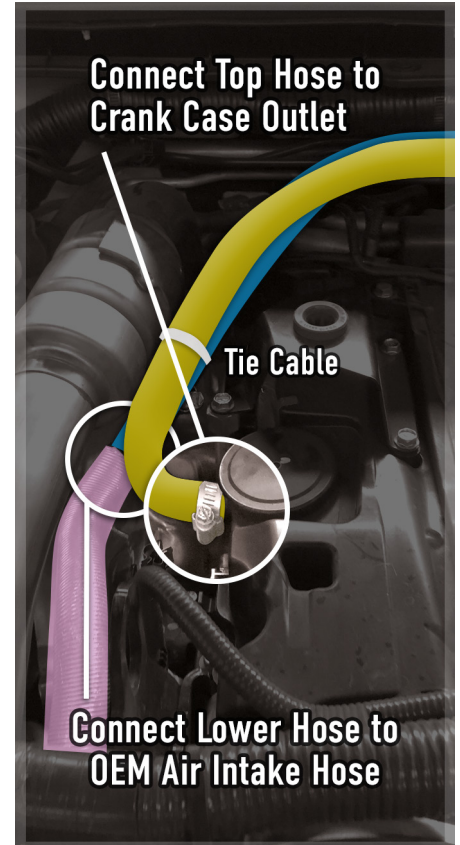

Step6:

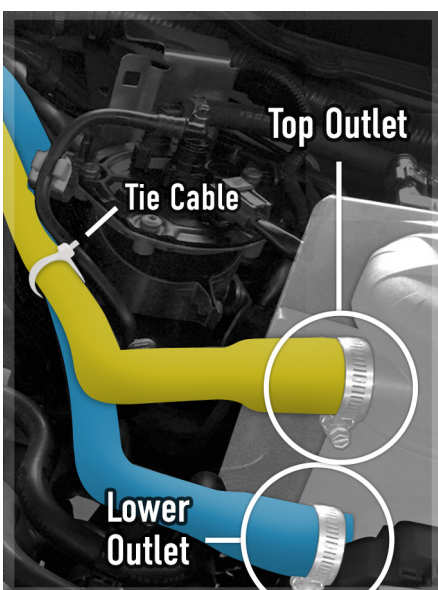

Step7:

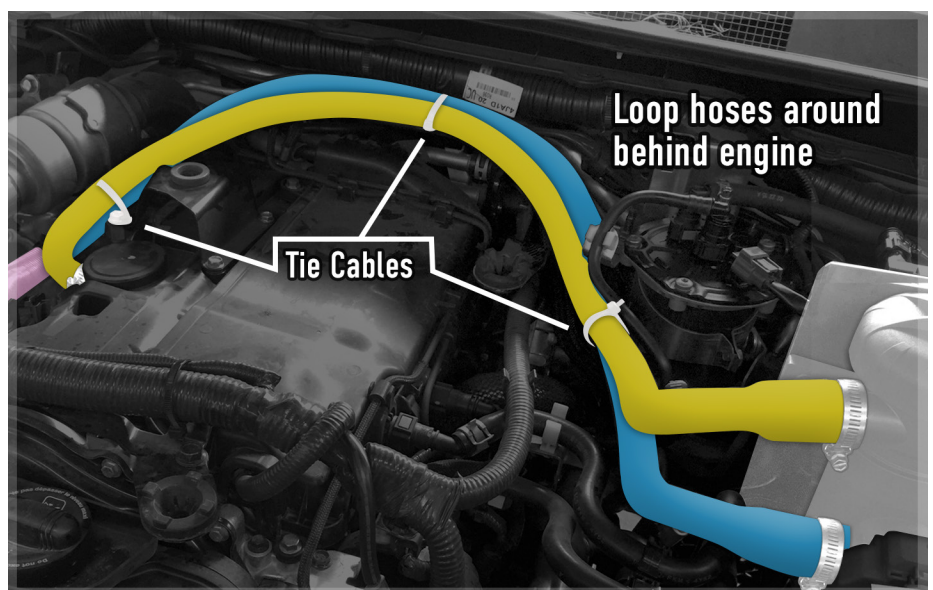

Step8: